



Portable Buildings of Moriarty



BASE PRICES Price includes roof only with 8' eave height

32x20	34x20	36x20	38x20	40x20
\$5,795	\$5,995	\$6,195	\$6,395	\$6,595
32x25	34x25	36x25	38x25	40x25
\$7,045	\$7,295	\$7,545	\$7,795	\$8,045
32x30	34x30	36x30	38x30	40x30
\$8,295	\$8,595	\$8,895	\$9,195	\$9,495
32x35	34x35	36x35	38x35	40x35
\$9,645	\$9,970	\$10,295	\$10,620	\$10,945
32x40	34x40	36x40	38x40	40x40
\$10,795	\$11,145	\$11,495	\$11,845	\$12,195
32x45	34x45	36x45	38x45	40x45
\$12,045	\$12,445	\$12,845	\$13,245	\$13,645
32x50	34x50	36x50	38x50	40x50
\$13,295	\$13,745	\$14,195	\$14,645	\$15,095

Lull Lift Required for Installation
See Lift Guide for Details

Price not included, additional fee will be incurred.

Pricing shown is for Risk Category I/Wind Exposure B. Please call for Risk Category II/Wind Exposure C options.

STANDARD FEATURES *Rated for 35PSF-140MPH (3 second gusts, not sustained)*

Commercial grade features include 14 gauge galvanized steel truss system with industry leading tubular knee bracing, 29 gauge metal roofing with 20 year Beckers paint system, framing spaced 5' on center, concrete anchors or earth auger anchors are included in base price. Eagle Carports, Inc. is not responsible for stopping, or repairing leaks under base rails. Base leg height is 8' tall. Please note: Eagle Carports, Inc. does not provide any site work. Truss design may vary slightly (from picture above). Customers are required to contact local building/zoning departments about codes for permitting purposes before order finalization.


**Beckers
20 YEAR
Paint Warranty**
On roofing materials.
*Warranty covers paint fade and chalking.

**SCAN FOR
MORE INFO!**



- All cement pads must have turn down footers.
- Price does not include site preparation.
- Lot must be cleared and leveled prior to installation.



FREE EAGLE
W/PURCHASE OF GABLE END OR CLOSED END

INSTALLATION INCLUDED
ON YOUR LEVEL LOT - *Restrictions apply*

**90 DAY WORKMANSHIP
WARRANTY**

**FINANCING & RTO
AVAILABLE**

OPTIONAL FEATURES FOR 32' - 40' COMMERCIAL GRADES

Prices effective 2.12.2024

12 GAUGE FRAME UPGRADE 32' - 40' WIDE FLUSH MOUNT CONCRETE KIT	12 Gauge frame increases snow load rating to 45 psf and 105 mph.						
	20' L	25' L	30' L	35' L	40' L	45' L	50' L
	\$2,220	\$2,540	\$2,860	\$3,180	\$3,500	\$3,820	\$4,140

Flush mount kits allow cement pads to be the exact width and length of the building without requiring a 2" perimeter.

EAVE HEIGHT	HEIGHT	20' L	25' L	30' L	35' L	40' L	45' L	50' L
	9'	\$200	\$260	\$320	\$380	\$440	\$500	\$560
	10'	\$250	\$330	\$410	\$490	\$570	\$650	\$730
	11'	\$300	\$390	\$480	\$570	\$660	\$750	\$840
	12'	\$375	\$475	\$575	\$675	\$775	\$875	\$975
	13'	\$475	\$585	\$695	\$805	\$915	\$1,025	\$1,135
	14'	\$575	\$695	\$815	\$935	\$1,055	\$1,175	\$1,295
	15'	\$675	\$815	\$955	\$1,095	\$1,235	\$1,375	\$1,515
	16'	\$775	\$925	\$1,075	\$1,225	\$1,375	\$1,525	\$1,675

CLOSE BOTH SIDES / VERTICAL	HEIGHT	20' L	25' L	30' L	35' L	40' L	45' L	50' L
	8'	\$1,095	\$1,320	\$1,545	\$1,770	\$1,995	\$2,220	\$2,445
	9'	\$1,195	\$1,445	\$1,695	\$1,945	\$2,195	\$2,445	\$2,695
	10'	\$1,395	\$1,695	\$1,995	\$2,295	\$2,595	\$2,895	\$3,195
	11'	\$1,445	\$1,770	\$2,095	\$2,420	\$2,745	\$3,070	\$3,395
	12'	\$1,545	\$1,895	\$2,245	\$2,595	\$2,945	\$3,295	\$3,645
	13'	\$1,595	\$1,945	\$2,295	\$2,645	\$2,995	\$3,345	\$3,845
	14'	\$1,695	\$2,045	\$2,395	\$2,745	\$3,095	\$3,445	\$4,095
	15'	\$1,795	\$2,220	\$2,645	\$3,070	\$3,495	\$3,920	\$4,345

V. WAINSCOTING	\$320	\$400	\$480	\$560	\$640	\$720	\$800
----------------	-------	-------	-------	-------	-------	-------	-------

CLOSE ONE END / VERTICAL Per End	HEIGHT	32' W	34' W	36' W	38' W	40' W
	8'	\$1,995	\$2,120	\$2,245	\$2,370	\$2,495
	9'	\$2,095	\$2,245	\$2,345	\$2,545	\$2,695
	10'	\$2,195	\$2,345	\$2,495	\$2,645	\$2,795
	11'	\$2,395	\$2,520	\$2,645	\$2,770	\$2,895
	12'	\$2,495	\$2,670	\$2,845	\$3,020	\$3,195
	13'	\$2,595	\$2,770	\$2,945	\$3,120	\$3,295
	14'	\$2,695	\$2,870	\$3,045	\$3,220	\$3,395
	15'	\$2,795	\$2,970	\$3,145	\$3,320	\$3,495

V. WAINSCOTING Per End	\$560	\$595	\$630	\$665	\$700
------------------------	-------	-------	-------	-------	-------

OPTIONS FOR 32'-40' WIDE UNITS	20' L	25' L	30' L	35' L	40' L	45' L	50' L
65 PSF / 105 MPH RATING (FRAME: 4' OC OR LESS)	\$995	\$1,990	\$1,990	\$1,990	\$1,990	\$2,985	\$2,985
170 MPH / 0 PSF RATING (FRAME: 4' OC OR LESS)	\$995	\$1,990	\$1,990	\$1,990	\$1,990	\$2,985	\$2,985

WALK-IN DOORS - 36" X 80"		
Size	Non-Rated	Wind-Rated
MOBILE HOME DOOR	\$400	\$550
9 LIGHT STEEL DOOR	\$650*	N/A

*Special Order item. ONLY available to install on cement.

WINDOWS White with Grid		
Size	Non-Rated	Wind-Rated
24"x36"	\$200	\$220
30"x36"	\$220	\$240

ROLL UP GARAGE DOORS		
Size	Non-Rated	**Wind-Rated
6'x7'	\$600	N/A
8'x8'	\$800	\$1,100
9'x8'	\$850	\$1,200
10'x8'	\$950	\$1,300
10'x10'	\$1,200	\$1,400
12'x12'	\$2,200	\$3,100
*14'x14'	\$3,000	\$4,000

*Lift required for installation. **Wind Rated Door Protects from blowouts.


**Special Order items. Due to design, door is significantly louder than a standard roll up door.

45° TRIM KIT		
Garage Door or Frame Out	Per Opening	Add-on
	\$100	

Must close end or side

CORNER KIT Must add Gable		
Legs 6' - 8'	Legs 9' - 12'	Legs 13' - 16'
\$225	\$375	\$525

2' wide max on each side. Must pair with gable.

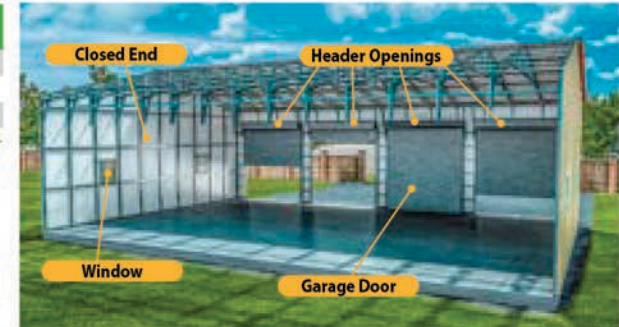

3' SIDE PANELS (VERTICAL) Includes both sides covered.							
20' L	25' L	30' L	35' L	40' L	45' L	50' L	
\$340	\$405	\$480	\$555	\$640	\$695	\$760	

TRIMMED GABLE END	32' - 40' WIDE
	\$825 PER END

COMMERCIAL HEADERS / LARGE OPENINGS UNITS 32' - 40'			
OPENINGS ONLY		OPENING WITH DOOR	
ON END 6'-16' OPENING	\$125	ON END 6'-12' OPENING	\$0
ON SIDE 6'-12' OPENING	\$300	ON END 13'-14' OPENING	\$125
ON SIDE 13'-16' OPENING	\$350	ON SIDE 6'-12' OPENING	\$125
		ON SIDE 13'-14' OPENING	\$200

*Side must be 1' taller than desired door height. 14'x14' requires 2 foot taller

EXTRA RAFTERS/ TRUSSES	32' - 40' W	ADDITIONAL HEIGHT
	\$1,350	8' standard incl. \$30 per foot up to 14' tall.

FRAME OUTS - Use for framing of customer provided windows & doors	WINDOW	WALK-IN DOOR
	\$70	\$85

SIDE CONNECTION FEES Per Side							LEAN TO CONNECTION FEES On End	
20' L	25' L	30' L	35' L	40' L	45' L	50' L	32'-40'	
\$120	\$140	\$160	\$180	\$200	\$220	\$240	\$500	

INSULATION		
DOUBLE BUBBLE TYPE (MOISTURE BARRIER)	R5	\$1.50 SF
2" FIBERGLASS	R7	\$2.25 SF

ROOF (Vertical Only): Add 2' to width and multiply by length. Ex. 24' wide x 26' long 26 x 26 = 676 SF x \$/per SF

SIDES: Multiply leg height by length by 2. Ex. 26' long x 10' tall 10 x 26 = 260 x 2 = 520 sf x \$/per SF

ENDS: Add 1.5 to leg height, multiply by building width. Ex. 24' wide x 10' tall 11.5 x 24 = 276 x 2 = 552 sf x \$/per SF

ADDITIONAL LABOR FEES	20' L	25' L	30' L	35' L	40' L	45' L	50' L
BUILD OVER FEE	\$150	\$175	\$200	\$250	\$275	\$325	\$350
CUT LEGS ON SITE*	\$100	\$125	\$150	\$175	\$200	\$225	\$250

*Cut leg fee has a maximum of 12" adjustment possible, either front to back or side to side. Please note, side to side on level lots will result in gap underneath garage doors.

CONCRETE DIMENSIONS	
All stated dimensions are in reference to the frame size, not the roof dimensions. All cement pads require 2" wider on all sides. Ex. 20' wide x 30' long unit will need a 20'4" wide x 30'4" long pad.	